



## RTxSC3

### Trench Rollers




### The smart remote-controlled trench roller

The RT trench roller with the SC3 infrared-remote control offers proven compaction results with safer operation. The smart control uses an infrared signal with line-of-sight control. The machine stops moving and vibrating should the line-of-sight be lost or if the operator comes within three feet (one meter) of the roller's receiving eyes with the control box. The articulated trench roller below the axle exciter in each drum to allow for the efficient transfer of compaction energy to the soil for superior compaction results. Available with the choice of Kohler or Kubota engine. The RTx models are available with Compatec, the compaction control system that indicates the relative compaction level of the soil.

- Patented three receiving eye design eliminates signal loss from trench shoring while retaining the line-of-sight control of the roller. With 16 channel transmission, multiple rollers can be operated on the same job site without interference from one another.
- RTx model offers flexible drums that allows for convenient conversion from 32 in/82 cm to 22in/56 cm. The easy to remove extensions have a central mounting system that protects the bolts from exposure to damage during operation.
- The articulated joint increases maneuverability and the low center of gravity improves stability. High and low compaction force provides flexibility depending on the job.
- The lower end is completely maintenance-free due to the self-lubricating design of the drive and the exciter.
- The engine control module with diagnostic LEDs monitors machine functions such as oil pressure, radiator level, engine temperature, glow plug, battery and air filter capacity for easy operation and troubleshooting.




**WACKER  
NEUSON**  
*all it takes!*

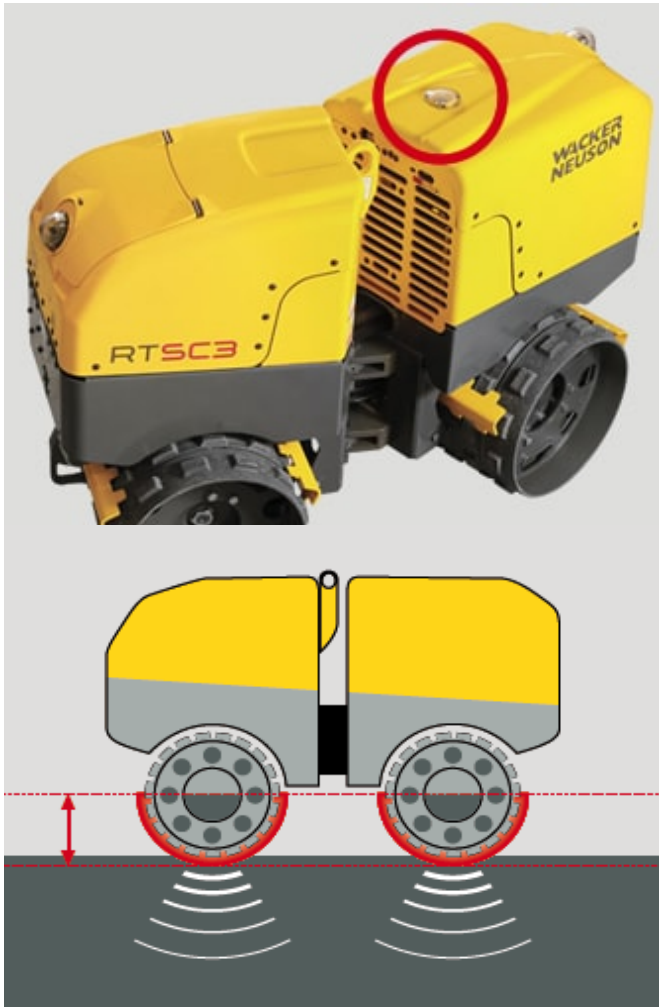

Below the axle exciter in each drum: means more efficient transfer of compaction energy to the soil and improved stability of the machine.

### Third infrared receiving eye

A prominently placed infrared receiving eye on top of the Trench Roller ensures that the remote control contact is maintained permanently, even in the trench shoring.

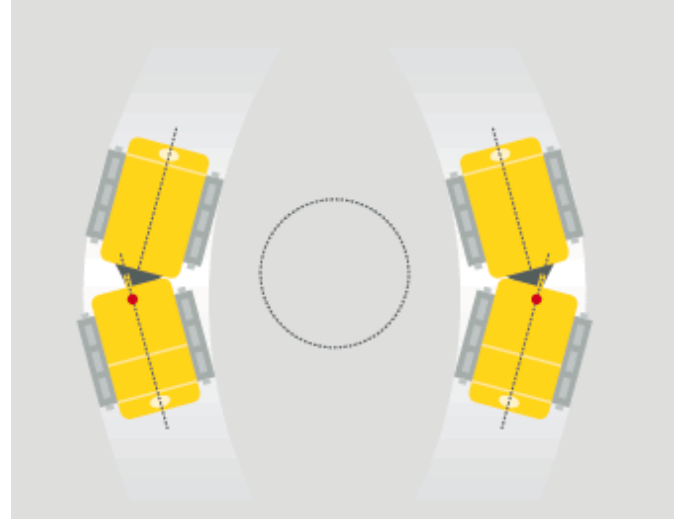

The articulated joint enables continuous operation around curved building segments.



### Compatec - Compaction Control

The RTx models are available with Compatec, Wacker Neuson's compaction control.

If the number of lights no longer increases, then the maximum soil compaction possible with this unit has been achieved.



## Technical specifications

	RTLx-SC3	RTKx-SC3
<b>Operating data</b>		
Operating weight lb	3,295	3,235
L x W x H in	73 x 32 x 50	73 x 32 x 50
Drum diameter in	20.5	20.5
Width Drum in	22 / 32*	22 / 32*
Centrifugal force (min.) lbf	7,700	7,700
Centrifugal force (max.) lbf	15,400	15,400
Frequency Hz	41.7	41.7
Linear force static (per drum) lb/in	58.3	56.2
Linear force dynamic (per drum) lb/in	258	258
Travel speed forward mph	1.5	1.5
Travel speed reverse mph	1.5	1.5
Turning radius inner in	63	63
Surface capacity max. (depending on soil consistency) ft <sup>2</sup> /h	10,654	10,654
Gradeability max. (without vibration) %	50	50
Gradeability max. (with vibration) %	45	50
<b>Engine / Motor</b>		
Engine / Motor type	Water-cooled 3-cylinder diesel engine with electric starter	Water-cooled 3-cylinder diesel engine with electric starter
Engine / Motor manufacturer	Kohler KDW 1003	Kubota D902
Displacement in <sup>3</sup>	62.7	54.8
Operating performance (DIN ISO 3046) hp	19.8	20.8
RPM / speed Operating rpm	3,000	3,000
Fuel type Low Sulfur / Ultra Low Sulfur	Diesel	Diesel
Fuel consumption US gal/h	1.2	1.2
Tank capacity US gal	6.3	6.3

\*RTx model drums can be configured for 32in (820mm) or 22in (560mm) width.



**WACKER  
NEUSON**  
*all it takes!*

**Please note**

that product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions.

Subject to alterations and errors excepted. Applicable also to illustrations.

Copyright © 2018 Wacker Neuson SE.